


Hulas Tile



RECOMMENDED — USAGE —



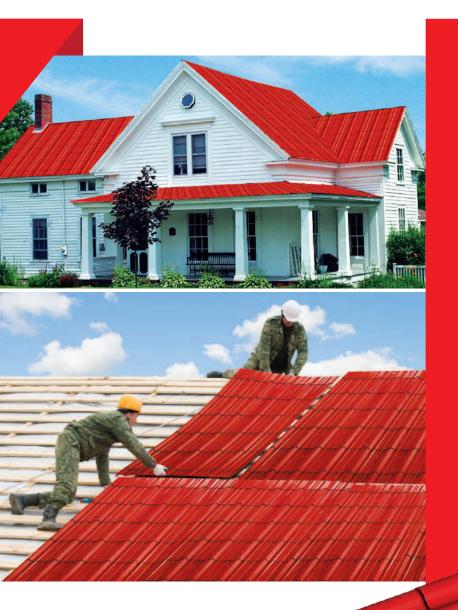

Residence



Temple


Less Purlins required during truss construction







Hulas Tile

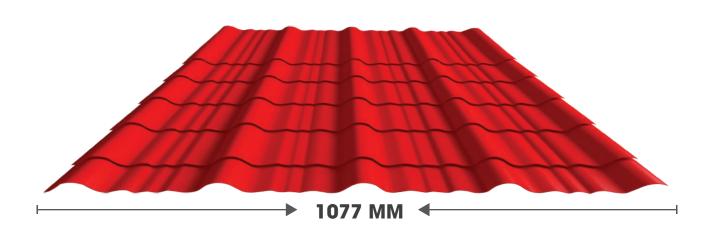

Profile

Hulas Tile Profile **Shapes & Dimension** of Profile



Effective Width (mm)

1015

Base Metal Thickness (mm)

0.45

Available in Length (ft)

6' to 16'

SPECIAL FEATURES

OF HULAS CORRUGATED **COLOR ROOFING SHEETS**



Made with International Cold Rolled Steel



Imprinted with Hulas 'Gurans' logo



Aluminium & Zinc Coating



(Prime Coat) Prevents Climate Effects



Colors that Prevent UV and other harmful Rays



Made with Japanese Standard



50+ Micron High Quality Coating



Affiliated with the World's Best Paint Technology by Beckers



Environment Friendly Technology



ECCA Compliant Coil Coating Standard





Hulas Steel Industries Limited

Corporate Office: Sundhara, Ganabahal, Kathmandu Tel: 01 - 5350772/3

Toll free no.: 16600178888 / 16600179999 Email: info@hsi.com.np





